



AN INTELLECTUAL ROBOT FOR INDUSTRIAL PURPOSE

Kasam Prashanth¹, Surender Moode², Anil Sooram³

¹M.Tech Student, Dept of ECE, Farah Institute of Technology, Chevella, T.S, India

²Assistant Professor, Dept of ECE, Farah Institute of Technology, Chevella, T.S, India

³Associate Professor & HOD, Dept of ECE, Farah Institute of Technology, Chevella, T.S, India

ABSTRACT:

We demonstrate the strength of our approach using numerous common objects with assorted dimensions, shapes, weights, and surface compliances. The commercial robot, made up of the rotating torso and a pair of seven degree-of-freedom arms, performs autonomous vision-based target alignment of each of your arms using fiducially markers, two-handed grasping and pressure control, and effective object manipulation in the tile-automatic framework. The operator uses hands motions to command the most well-liked position for your object via Microsoft Kinect because the autonomous pressure controller looks after a reliable grasp. We present a manuscript system to achieve matched up task-based control around the dual-arm industrial robot for your general tasks of visual serving and bimanual hybrid motion/pressure control. Gestures detected with the Kinect may also be familiar with dictate different operation modes. Note to Practitioners-Industrial robots typically are preprogrammed with educate pendants to complete simple repetitive tasks without any sensor feedback. The job was motivated by showing that industrial robots might also perform advanced, sensor based tasks for instance visual serving, pressure-feedback control, and teleportation. Industrial robots are often limited to the extended delay between command and action, though careful tuning, we demonstrate that these sensor-based techniques continue being achievable despite off-the-shelf sensors. The communication involving the components is founded on a product-oriented distributed control and communication software architecture referred to as Robot Raconteur.

Keywords: *Binary tag, human interface, industrial robot, primary: dual-arm manipulation, secondary: visual serving, tile-robotics.*

1. INTRODUCTION:

Industrial robots allow limited feedback from sensors, for example vision or pressure/torque sensors, through command trajectory modification, but they're not created for human interaction. Probably the most prevalent utilization of robots today involves industrial robots in manufacturing lines. These robots are designed through educate pendants to traverse via a retaught group of suggests execute repetitive tasks. Even if exterior sensors are utilized, they're targeted at specific tasks. Scalping strategies typically involve just one robot arm outfitted by having a finish effector devoted to some specific type of tasks. Multi-arm industrial robots and tile-robots are often observed because of their mechanical and system level complexity [1]. When multiple arms collectively hold a lot, additionally to the motion from the load, the interior pressure inside the load must be controlled for stable grasping while staying away from harmful the part. Within the situation of pressure-reflecting teleportation, synchronization and stability issues are more serious, because the human operator must regulate both pressure of interaction between your load and also the atmosphere and also the internal squeeze pressure within the load. Within this paper,

we present a manuscript tile-automatic framework for human-directed dual-arm manipulation. A person's operator provides gestural instructions and motion directives, as the control system autonomously locates the item of great interest and keeps grasp pressure closure. Our approach is sensor-based, permitting versatility in task specs and execution. We consider robots with multiple cinematically redundant arms. Such robots can tackle a significantly larger selection of tasks than the usual single arm, but simultaneously incur elevated complexity when it comes to potential collision in addition to pressure of interaction in collaborative tasks. These dual-arm and humanoid-style robots have grown to be especially interesting recently because of the ongoing DARPA Robotics Challenge, meant to develop highly sophisticated automatic response systems for extreme emergencies. For that specific implementation and illustration showing our approach, we make use of a 15-degree-of-freedom (doff) dual-arm industrial robot (Motorman SDA10) along with a suite of peripheral sensors distributed over multiple computer systems. We integrate these subsystems together inside a distributed system using Robot Raconteur (RR), the

item-oriented distributed control and communication software system coded in our laboratory, and today readily available for download at robotraconteur.com. We decide RR over other distributed automatic middleware systems for example ROS Industrial because of its multiplatform compatibility, true distributed implementation, object-oriented philosophy, and simplicity of use [2].

II. RELATED WORK

This paper mainly addresses matched, task-based control techniques for any dual-arm industrial robot. Since there's a sizable body of labor on single-arm robotics, we narrow our scope of related try to only dual- or multi-arm robots. Several papers have presented methods for mixing motion and pressure control for multi-arm platforms. The normal solutions are through hybrid position/pressure control, in which the position and pressure control loops are decoupled and treated individually, or through impedance control, that has the overall objective of acquiring a preferred dynamic interaction between your robot and object or atmosphere. We use the hybrid position/pressure control method to directly impart a squeeze pressure. Many

position/pressure control methods derive from robot dynamic models and motor torque control. Since direct low-level robot control isn't feasible for many industrial robots, we make use of the kinematics-based position accommodation plan. For autonomous procedures, tasks for multi-arm robots are frequently resolved using planning calculations with known geometry information where the motion path is calculated offline after which carried out in open-loop. There's also autonomous grasp planners for example Grasp It! and OpenGRASP, however they only address rigid objects. Sensor-based motion planning can be done, but because of the computational complexity it is almost always restricted to easy systems.

III. METHODOLOGY

The aim of the work would be to create a robust and versatile tile-automatic system for dual-arm manipulation of the held object [3]. The positioning, dimensions, weight and mass distribution from the object are unknown just before manipulation, and all sorts of necessary parameters are believed online according to sensor dimensions. The machine is to locate relatively large object inside the robot workspace, grasp it at two

designated, near-parallel contact points, after which manipulate the item based on a reference signal provided through either teleportation from the human operator or perhaps a predefined sequence of poses. We predict the prospective load to become relatively large and not able to become held between your fingers of the traditional gripper [4]. The pressure control function instructs the 2 finish effectors to use a squeezing pressure for any sufficiently secure grasp, both in a stationary pose and through manipulation. Within our implementation, the operator provides input while using Kindest this type of non-contact gesture-based interface is especially attractive because the user is unfettered by mechanical constraints. The input towards the Motorman HSC is really a vector of 15 joint corrections that then goes through a trajectory generator. With tight low-level motor servo loops, we are able to disregard the dynamics and fairly approximate the robot response having a first-order plus-dead-time plant. It established fact the potential field approach may create local minima which the robot might get stuck. In human-directed motion, the operator could customize the motion command to pressure the robot from the local minimum. In

autonomous motion, preplanning or modification from the potential field might be necessary. Though we understand the possibility, this is not a problem within our experiments. There's a lengthy background and a sizable body of literature on visual serving. However, feature extraction under different lighting conditions, surface geometries, and textures's time-consuming and error prone. We decide an easy, yet robust, shortcut to object recognition and placement, by marking the grasping point with binary tags. Fiducially markers have lengthy been accustomed to aid object identification and placement in machine vision The ALVAR library determines the pose of every tag by mapping the holography between your known position of points during tag frame towards the measured pixels within the image frame. We define infeasible regions for that finish effectors to be too near to the object, too near to the body from the robot, and poses that don't range from the tag within the camera field of view. We construct virtual walls in the boundary of all these regions [5]. The visual serving formula guides each finish effector to align using its specified contact. Since we don't have rigid grasp, pressure control is direction dependent.

Because the dry contact friction is proportional towards the normal pressure, a greater squeeze pressure is generally more inviting than the usual lower squeeze pressure, though excessive pressure might cause undesirable deformation or perhaps damages. We represent the tile-automatic system like a finite condition machine, with three major components: visual serving, stable grasping, and human-commanded motion. The transition between your states is through either motion or pressure control to specified locations or thresholds, or through discovering user gestures. After choosing the object, positioning the finish effectors, and safely grasping the item, the robot moves the item towards the specified home position. The beginning gesture initiates a person's-directed motion while using kindest interface. The pause gesture stops a person's interface and waits in position. The house gesture returns the machine towards the home configuration. The exit gesture terminates the operation. The discharge gesture releases the item.

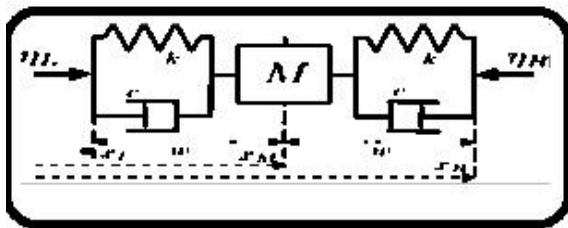


Fig.1. ID contact model

IV. CONCLUSION

We integrated these interconnected components inside a robust and versatile distributed control and communication architecture, and shown. The primary aspects of the machine include vision-led motion control, redundancy resolution, collision avoidance, squeeze pressure control, load compensation, and human gestural interface. We presented the expansion and outcomes of a dual-arm telerobotic system concerning the combination of countless sensors and actuators by having an industrial robot. Outcomes of a person commanding the positioning set point utilizing a Microsoft Kinect. Effectiveness in adjusting a number of objects with various shapes, surface textures, weights, and mass distributions. As the implementation and demonstration is perfect for a particular platform, we mostly use off-the-shelf components and software, therefore the approach is definitely extensible with other robots and platforms. We used a commercial robot controller, and despite its significant time delay, we could achieve robust performance for complex motion and pressure objectives. A limitation for this implementation is it is unconditionally only effective like a local

planner later on we'll incorporate global planning techniques to deal with local equilibrium and introduce modern-day redundancy resolution. In the present system, we used high-friction contact pads created for no rigid grasping. Motivated by fabric layups in composites manufacturing, we're also looking into an alternative around the earlier talked about complementarity pressure control condition in which, rather than using a squeeze pressure on the rigid body, the robot must conserve a recommended tension inside a flexible object during motion. We're also looking into using modern, articulated grippers within the types of manipulation tasks analyzed within which an enveloping grasp doesn't seem possible. To show the generality in our approach, we're presently stretching our implementation with other industrial dual-arm systems like the Baxter by Re-think Robotics.

REFERENCES

- [1] F. Burget, A. Hornung, and M. Bennewitz, "Whole-body motion planning for manipulation of articulated objects," in *Proc. IEEE Int. Conf. Robot. Autom. (ICRA)*, May 2013, pp. 1656–1662.
- [2] M. T. Mason, "Compliance and force control for computer controlled manipulators," *IEEE Trans. Syst. Man, Cybern.*, vol. 11, no. 6, pp. 418–432, Jun. 1981.
- [3] DARPA Robotics Challenge Trials 2013, 2012. [Online]. Available: www.theroboticschallenge.org, accessed Dec. 24, 2013 M. Fiala, "Designing highly reliable fiducially markers," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 32, no. 7, pp. 1317–1324, Jul. 2010.
- [4] B. Cohen, S. Chitta, and M. Likhachev, "Search-based planning for dual-arm manipulation with upright orientation constraints," in *Proc. IEEE Int. Conf. Robot. Autom. (ICRA)*, May 2012, pp. 3784–3790.
- [5] J. Wen and K. Kreutz-Delgado, "The attitude control problem," *IEEE Trans. Autom. Control*, vol. 36, no. 10, pp. 1148–1162, Oct. 1991.

**KASAM PRASHANTH**

Graduated in B.Tech ECE in 2013 from JNTU Hyd. He perusing M.TECH in ECE

Dept in Farah Institute of Technology, Chevella, R.R. Dist Telangana State, India. His research interests include Real time Embedded systems.

**SURENDER MOODE**

Graduated in B.Tech ECE in 2008 from JNTU Hyd. He received Masters Degree in M.Tech [ECE] from JNTUH University, Hyderabad.

Presently he is working as Assistant Professor in ECE Dept in Farah Institute of Technology, Chevella, R.R. Dist Telangana State, India. His research interests include Wireless Communications, communication Systems.



Anil Sooram Graduated in B.Tech ECE in 2007 from JNTU Hyd. He received Masters Degree in M.Tech [ECE] from JNTUH

University, Hyderabad. Presently he is working as Associate Professor in ECE Dept. in Farah Institute of Technology, Chevella, R.R. Dist Telangana State, India. His research interests include Wireless Communications, Embedded Systems. He has published 3 research papers in International Conferences, Journals. He has received best Teacher award from Farah Group.